

FG35P

8,000 Lb.

LPG

Pneumatic Tire

Specifications & Features



*(The photo above includes optional dual drive tires & wide carriage).
The LPG model includes LPG tank bracket behind OHG.*

FG35P



Authorized Distributor
Alden Equipment, Inc.
66 ½ Bridge Street
Amsterdam, NY 12010
POC: Charles Barber
Ph (518) 842-6704
sales@aldenequipment.com

Model (LPG)			FG35P
Capacity		Lbs.	8,000
Load Center		Inches	24
Engine		Engine Type	LPG
Tires Air Pneumatic		Front Rear	22 x 9 x 16 6.50 x 10 (10pr)
Fork Size Length		Inches	48
Mast Tilt – fwd/back		Degrees	6 / 12
Total Width – add 17” if Dual Drive		Inches	53.1
Mast Height Mast Lowered Height – See chart below		Inches	118-217 84-96
Overhead Guard Height		Inches	84.3
Minimum Outside Turning Radius		Inches	106.9
Max Seat Height		Inches	44.8
Travel Speed (maximum)		MPH	11.2 mph
Total Length – less forks		Inches	110
Service Weight		Lbs.	10361
LPG – General Motors 3.0L		HP/rpm	75/3000
Wheelbase		Inches	76.8
Brakes		type	Hand/Foot
LPG Engine / Model			GM 3.0L
Transmission - Power shift		Automatic	Automatic

Type Inch / (mm)	Lowered Height “	Raised Height “	Free Lift “	Tilt Forward deg	Tilt Back deg
Standard Mast	84	130	6	6	12
Standard Mast	88	138	6	6	12
Standard Mast	92	146	6	6	12
FFL Mast	84	130	65	6	12
Triple	84.6	192	60	6	6
Triple	86	197	62	6	6
Triple	96	217	72	6	6

Features & Benefits

- GM 3.0L, 4 cycle, 4 cylinders, 75hp, 181 cu in displacement. Nodular iron crankshaft for increase strength, world-class engine sealing system for superior leak protection. Sintered powdered-metal exhaust valve seats for enhanced durability and noise reduction. Cast Iron block, cast iron head and cast iron manifold.

- Power shift (Automatic) transmission with separate inching and brake pedals, offers positive operation in tight working areas, especially beneficial working on ramps and inclines.

- High visibility design mast with side thrust rollers in the carriage for smoother operation and longer life of the mast components.

- Fully Hydrostatic Power Steering for smoother operation and many fewer parts for lower maintenance costs. This utilizes the largest cylinder and thickest steel for protection of any forklift in its class!

- Large hydraulically actuated Drum & Shoe type brakes for positive braking performance and ease of maintenance. Mechanical lever type parking brake for reliability.

- Control Handles are mounted on the dash for operator convenience and also allows the operator to enter/exit the operator compartment from either side of the machine comfortably.

- Tilt Steering Wheel
- Adjustable Seat
- Seat Belt
- Dual Head Lights
- Front Turn Signals
- Rear Turn Signals
- Brake Lights
- Back-up Lights
- Back-up Alarm
- Neutral Safety Switch
- Welded Overhead Guard
- Integral Fuel Tank
- Integral Hydraulic Tank
- High air intake
- Cyclone air cleaner
- Insulated engine cover
- Hand hold for entry
- Radiator overflow bottle
- Third valve & lever
- Horn
- Hour Meter
- Charge warning light
- Temperature warning light
- Oil pressure gauge
- Key switch
- Safety load backrest
- Swing-down LPG tank bracket
- ITA Class II forks & carriage
- Easy access floor boards
- Rubber safety mat
- Meets or exceeds all ANSI B56.1 safety standards for powered industrial trucks
- CE Rated
- EPA Compliant



FG35P


Standard Equipment



Optional Equipment

- Two Stage Mast
- Pneumatic Tires
- GM 3.0L Engine
- Auto Transmission
- Headlights
- Back Up Lights
- Turn Signals
- Hydro Steer Axle
- Mirrors
- Load Backrest
- Seat Belt
- Tilt Steer Wheel
- 3rd Valve
- Operator Manual
- Standard Forks

- Various Masts
- Standard mast
- Full Free Lift
- Triplex mast
- Various Tire Options
- CUSHION tires
- DUAL drive tires
- Solid pneumatic
- Foam Filled
- Side Shifters
- 4 Way Hydraulics
- Fork Positioner
- All weather CAB
- Attachments
- Much More!

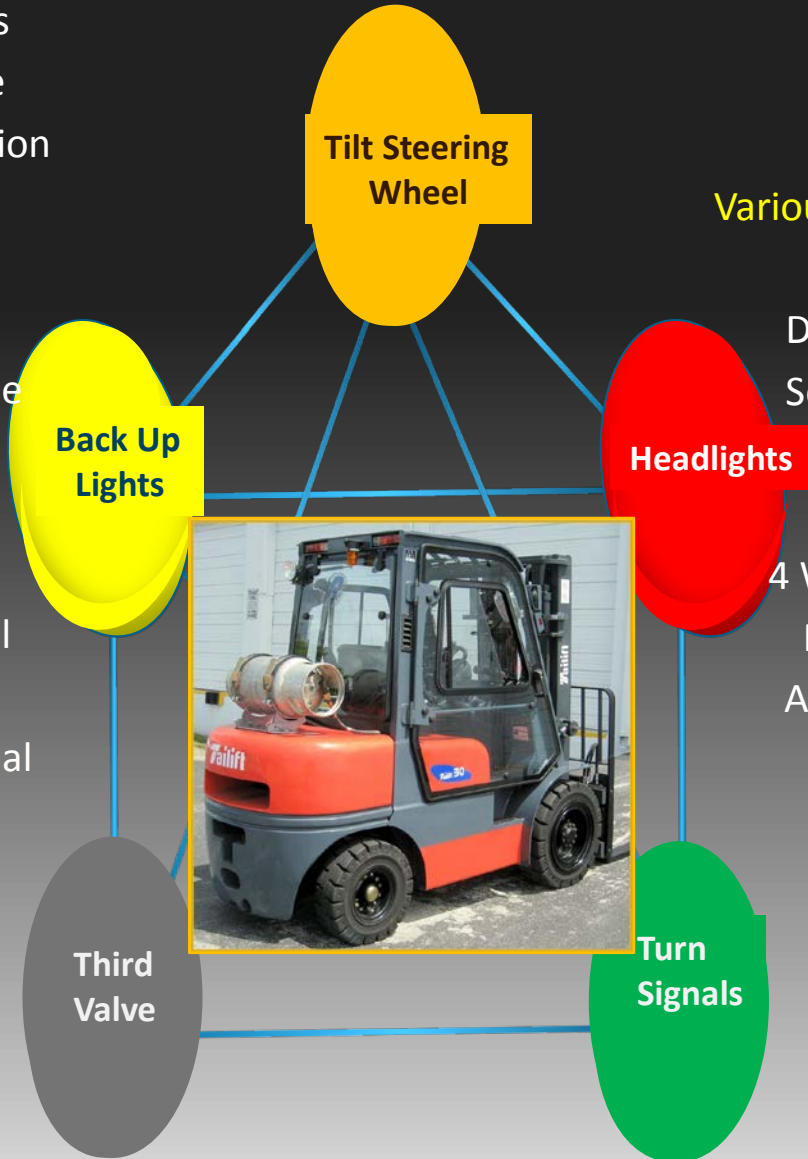

All photos may include optional equipment



Specifications are subject to change. Tailift reserves the right to make improvements and changes to their equipment at any time without prior notice.



FG35P
8000lb LPG
Pneumatic